

# Bourdon tube pressure gauge, copper alloy Liquid filling, plastic case Model 113.13, NS 40 [1 ½"], 50 [2"] and 63 [2 ½"]

WIKA data sheet PM 01.04



For further approvals,  
see page 6

## Applications

- For measuring points with high dynamic pressure loads or vibrations
- For gaseous and liquid media that are not highly viscous or crystallising and will not attack copper alloy parts
- Pumps and compressors
- Hydraulics

## Special features

- Cost-effective design
- Vibration resistant



Model 113.13, lower mount (radial)

Configurator



Standard articles



## Description

The model 113.13 is a liquid-filled pressure gauge with plastic case. The liquid filling causes damping of the internal components and contributes to an increased vibration and shock resistance. Thus the pressure gauges are suitable for installation in machines and plants where strong vibrations and shocks are expected.

These pressure gauges are based on the proven Bourdon tube measuring system. The deflection of the Bourdon tube is transmitted to a movement and indicated.

The plastic case and the window are welded together and an O-ring seals the process connection at the case. In this way the instrument fulfils the high requirements for IP65 ingress protection.

With accuracy class 2.5 and the available nominal sizes 40 [1 ½"], 50 [2"] and 63 [2 ½"], this model is suited for a wide range of applications in industry.

The mounting bracket, which is available as an option, enables the panel mounting of pressure gauges with back mount process connection. The nominal size 63 [2 ½"] version with back mount process connection is alternatively offered with a mounting flange on the front of the instrument. This mounting flange is used when, for example, panel mounting is only possible from the front.

## Specifications

| Basic information   |                                                                                                                                                                                                                         |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Standard            | <ul style="list-style-type: none"> <li>■ EN 837-1</li> <li>■ ASME B40.100</li> </ul> → For information on the "Selection, installation, handling and operation of pressure gauges", see Technical information IN 00.05. |
| Nominal size (NS)   | <ul style="list-style-type: none"> <li>■ Ø 40 mm [1 ½"]</li> <li>■ Ø 50 mm [2"]</li> <li>■ Ø 63 mm [2 ½"]</li> </ul>                                                                                                    |
| Connection location | <ul style="list-style-type: none"> <li>■ Lower mount (radial) <sup>2)</sup></li> <li>■ Centre back mount</li> </ul>                                                                                                     |
| Window              | Acrylic glass (PMMA)                                                                                                                                                                                                    |
| Case                |                                                                                                                                                                                                                         |
| Design              | Safety level "S1" per EN 837-1: With blow-out device                                                                                                                                                                    |
| Material            | Plastic, black                                                                                                                                                                                                          |
| Mounting            | <ul style="list-style-type: none"> <li>■ Without</li> <li>■ Panel mounting flange, plastic, black <sup>1)</sup></li> <li>■ Mounting bracket, steel, zinc-plated <sup>2)</sup></li> </ul>                                |
| Case filling        | Glycerine <sup>2)</sup>                                                                                                                                                                                                 |
| Movement            | Copper alloy                                                                                                                                                                                                            |

1) Only available for NS 63 [2 ½"]

2) For low scale ranges the case filling is a glycerine-water mixture

| Measuring element         |                                            |
|---------------------------|--------------------------------------------|
| Type of measuring element | Bourdon tube, C-type or helical type       |
| Material                  | Copper alloy                               |
| Leak tightness            | Leakage rate: $< 5 \cdot 10^{-3}$ mbar l/s |

| Accuracy specifications |                                                                                                                                                     |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Accuracy class          |                                                                                                                                                     |
| EN 837-1                | Class 2.5                                                                                                                                           |
| ASME B40.100            | $\pm 3\%$   $\pm 2\%$   $\pm 3\%$ of measuring span (grade B)                                                                                       |
| Temperature error       | On deviation from the reference conditions at the measuring system:<br>$\leq \pm 0.4\%$ per 10 °C [ $\leq \pm 0.4\%$ per 18 °F] of full scale value |
| Reference conditions    |                                                                                                                                                     |
| Ambient temperature     | +20 °C [68 °F]                                                                                                                                      |

## Scale ranges

| bar       |           |
|-----------|-----------|
| 0 ... 0.6 | 0 ... 25  |
| 0 ... 1   | 0 ... 40  |
| 0 ... 1.6 | 0 ... 60  |
| 0 ... 2.5 | 0 ... 100 |
| 0 ... 4   | 0 ... 160 |
| 0 ... 6   | 0 ... 250 |
| 0 ... 10  | 0 ... 315 |
| 0 ... 16  | 0 ... 400 |
| 0 ... 20  | -         |

| kPa         |              |
|-------------|--------------|
| 0 ... 60    | 0 ... 2,500  |
| 0 ... 100   | 0 ... 4,000  |
| 0 ... 160   | 0 ... 6,000  |
| 0 ... 250   | 0 ... 10,000 |
| 0 ... 400   | 0 ... 16,000 |
| 0 ... 600   | 0 ... 25,000 |
| 0 ... 1,000 | 0 ... 31,500 |
| 0 ... 1,600 | 0 ... 40,000 |
| 0 ... 2,000 | -            |

| psi       |             |
|-----------|-------------|
| 0 ... 10  | 0 ... 500   |
| 0 ... 15  | 0 ... 600   |
| 0 ... 30  | 0 ... 800   |
| 0 ... 60  | 0 ... 1,000 |
| 0 ... 100 | 0 ... 1,500 |
| 0 ... 150 | 0 ... 2,000 |
| 0 ... 160 | 0 ... 3,000 |
| 0 ... 200 | 0 ... 4,000 |
| 0 ... 300 | 0 ... 5,000 |
| 0 ... 400 | 0 ... 6,000 |

| kg/cm <sup>2</sup> |           |
|--------------------|-----------|
| 0 ... 0.6          | 0 ... 25  |
| 0 ... 1            | 0 ... 40  |
| 0 ... 1.6          | 0 ... 60  |
| 0 ... 2.5          | 0 ... 100 |
| 0 ... 4            | 0 ... 160 |
| 0 ... 6            | 0 ... 250 |
| 0 ... 10           | 0 ... 315 |
| 0 ... 16           | 0 ... 400 |
| 0 ... 20           | -         |

| MPa        |            |
|------------|------------|
| 0 ... 0.06 | 0 ... 2.5  |
| 0 ... 0.1  | 0 ... 4    |
| 0 ... 0.16 | 0 ... 6    |
| 0 ... 0.25 | 0 ... 10   |
| 0 ... 0.4  | 0 ... 16   |
| 0 ... 0.6  | 0 ... 25   |
| 0 ... 1    | 0 ... 31.5 |
| 0 ... 1.6  | 0 ... 40   |
| 0 ... 2.0  | -          |

## Vacuum and compound scale ranges

| bar         |            |
|-------------|------------|
| -1 ... 0    | -1 ... +9  |
| -1 ... +0.6 | -1 ... +15 |
| -1 ... +1.5 | -1 ... +24 |
| -1 ... +3   | -1 ... +30 |
| -1 ... +5   | -          |

| kPa           |                 |
|---------------|-----------------|
| -100 ... 0    | -100 ... +900   |
| -100 ... +60  | -100 ... +1,500 |
| -100 ... +150 | -100 ... +2,400 |
| -100 ... +300 | -100 ... +3,000 |
| -100 ... +500 | -               |

| MPa            |               |
|----------------|---------------|
| -0.1 ... 0     | -0.1 ... +0.9 |
| -0.1 ... +0.06 | -0.1 ... +1.5 |
| -0.1 ... +0.15 | -0.1 ... +2.4 |
| -0.1 ... +0.3  | -0.1 ... +3   |
| -0.1 ... +0.5  | -             |

| psi               |                   |
|-------------------|-------------------|
| -30 inHg ... 0    | -30 inHg ... +160 |
| -30 inHg ... +15  | -30 inHg ... +200 |
| -30 inHg ... +30  | -30 inHg ... +300 |
| -30 inHg ... +60  | -30 inHg ... +400 |
| -30 inHg ... +100 | -                 |

→ Other scale ranges on request

| Further details on: scale ranges |                                                                                                                                   |
|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| <b>Unit</b>                      | <ul style="list-style-type: none"> <li>■ bar</li> <li>■ psi</li> <li>■ kg/cm<sup>2</sup></li> <li>■ kPa</li> <li>■ MPa</li> </ul> |
| <b>Dial</b>                      |                                                                                                                                   |
| Scale colour                     | Black                                                                                                                             |
| Material                         | Plastic, white                                                                                                                    |
| Customer-specific version        | Other scales, e.g. with red mark, circular arcs or circular sectors, on request                                                   |
| <b>Pointer</b>                   |                                                                                                                                   |
| Instrument pointer               | Plastic, black                                                                                                                    |
| <b>Pointer stop pin</b>          | <ul style="list-style-type: none"> <li>■ Without</li> <li>■ At zero point</li> </ul>                                              |

1) Red mark pointer with measuring ranges 0 ... 0.6 to 0 ... 60 bar

| Process connection |                                                                                                                                                  |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Standard</b>    | <ul style="list-style-type: none"> <li>■ EN 837-1</li> <li>■ ISO 7</li> <li>■ ANSI/B1.20.1</li> </ul>                                            |
| <b>Size</b>        |                                                                                                                                                  |
| EN 837-1           | <ul style="list-style-type: none"> <li>■ G ½ B, male thread</li> <li>■ G ¼ B, male thread</li> </ul>                                             |
| ANSI/B1.20.1       | <ul style="list-style-type: none"> <li>■ ½ NPT, male thread</li> <li>■ ¼ NPT, male thread</li> </ul>                                             |
| ISO 7              | <ul style="list-style-type: none"> <li>■ R ½, male thread</li> <li>■ R ¼, male thread</li> </ul>                                                 |
| <b>Restrictor</b>  | <ul style="list-style-type: none"> <li>■ Without</li> <li>■ Ø 0.5 mm [0.02"], copper alloy</li> <li>■ Ø 0.3 mm [0.012"], copper alloy</li> </ul> |

| Process connection |              |
|--------------------|--------------|
| Material (wetted)  |              |
| Process connection | Copper alloy |
| Bourdon tube       | Copper alloy |

→ Other process connections on request

| Operating conditions                |                                 |
|-------------------------------------|---------------------------------|
| Medium temperature                  | -20 ... +60 °C [-4 ... +140 °F] |
| Ambient temperature                 | -20 ... +60 °C [-4 ... +140 °F] |
| Pressure limitation                 |                                 |
| Steady                              | 3/4 x full scale value          |
| Fluctuating                         | 2/3 x full scale value          |
| Short time                          | Full scale value                |
| Ingress protection per IEC/EN 60529 | IP65                            |

## Approvals

| Logo                                                                              | Description                                                                                                       | Region         |
|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|----------------|
|  | <b>EU declaration of conformity</b><br>Pressure Equipment Directive<br>PS > 200 bar, module A, pressure accessory | European Union |
| -                                                                                 | <b>CRN</b><br>Safety (e.g. electr. safety, overpressure, ...)                                                     | Canada         |

### Optional approvals

| Logo                                                                              | Description                                                | Region     |
|-----------------------------------------------------------------------------------|------------------------------------------------------------|------------|
|  | <b>PAC Kazakhstan</b><br>Metrology, measurement technology | Kazakhstan |
| -                                                                                 | <b>PAC Ukraine</b><br>Metrology, measurement technology    | Ukraine    |
|  | <b>PAC Uzbekistan</b><br>Metrology, measurement technology | Uzbekistan |
| -                                                                                 | <b>PAC China</b><br>Metrology, measurement technology      | China      |

## Manufacturer's declaration

| Logo | Description                                                                         |
|------|-------------------------------------------------------------------------------------|
| -    | Pressure Equipment Directive (PED) for maximum allowable pressure $PS \leq 200$ bar |


## Certificates

| Certificates                            |                                                                                                                                                                                                                           |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Certificates</b>                     | <ul style="list-style-type: none"> <li>■ 2.2 test report per EN 10204 (e.g. state-of-the-art manufacturing, indication accuracy)</li> <li>■ 3.1 inspection certificate per EN 10204 (e.g. indication accuracy)</li> </ul> |
| <b>Recommended calibration interval</b> | 1 year (dependent on conditions of use)                                                                                                                                                                                   |

→ For approvals and certificates, see website

Dimensions in mm [in]

Model 113.13, lower mount (radial)

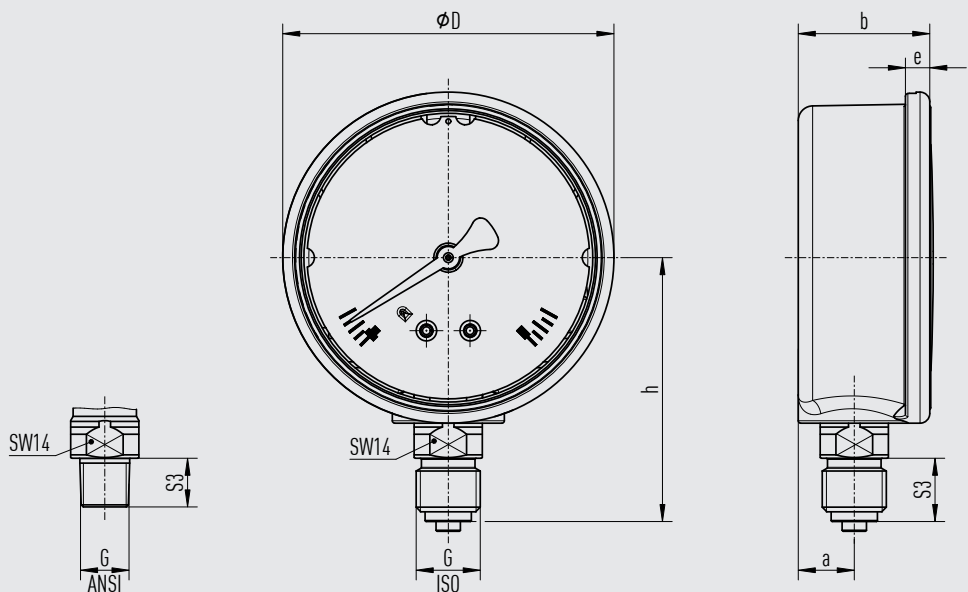




1034502.05

| NS        | G <sup>1)</sup>   | Dimensions in mm [in] |             |             |                |           |         |           |
|-----------|-------------------|-----------------------|-------------|-------------|----------------|-----------|---------|-----------|
|           |                   | D                     | h ±1 [0.04] | a           | b1 ±0.5 [0.02] | S3        | e       | SW        |
| 50 [2"]   | G ½ B, ½ NPT, R ½ | 55 [2.17]             | 45 [1.77]   | 11.5 [0.45] | 27 [1.06]      | 10 [0.39] | 5 [0.2] | 14 [0.55] |
|           | G ¼ B, ¼ NPT, R ¼ | 55 [2.17]             | 48 [1.89]   | 11.5 [0.45] | 27 [1.06]      | 13 [0.51] | 5 [0.2] | 14 [0.55] |
| 63 [2 ½"] | G ½ B, ½ NPT, R ½ | 68 [2.68]             | 51 [2.01]   | 11.5 [0.45] | 27 [1.06]      | 10 [0.39] | 5 [0.2] | 14 [0.55] |
|           | G ¼ B, ¼ NPT, R ¼ | 68 [2.68]             | 54 [2.13]   | 11.5 [0.45] | 27 [1.06]      | 13 [0.51] | 5 [0.2] | 14 [0.55] |

1) The G ½ B process connection of this instrument is manufactured without a centring spigot and with a thread runout instead of a thread undercut.




| NS        | Weight in kg [lb] |
|-----------|-------------------|
| 50 [2"]   | 0.11 [0.24]       |
| 63 [2 ½"] | 0.15 [0.33]       |

# **Model 113.13, NS 40 [1 ½"], centre back mount**



1034499.05

# **Model 113.13, NS 50 [2"] and NS 63 [2 ½"], centre back mount**

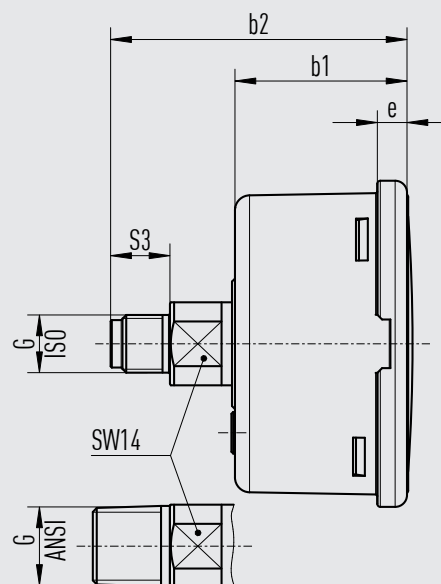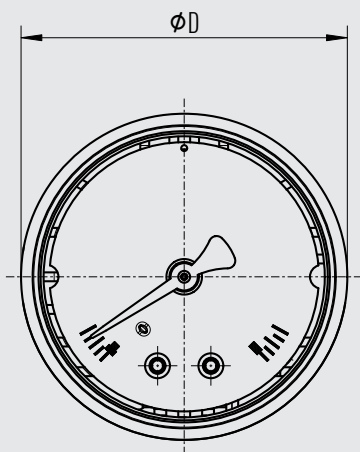

1034510.04


| NS        | G <sup>1)</sup>   | Dimensions in mm [in] |              |             |         |           |           |
|-----------|-------------------|-----------------------|--------------|-------------|---------|-----------|-----------|
|           |                   | D                     | b2 ±1 [0.04] | b           | e       | S3        | SW        |
| 40 [1 ½"] | G ⅝ B, ⅝ NPT, R ⅝ | 41 [1.61]             | 42.6 [1.68]  | 26.6 [1.05] | -       | 10 [0.39] | 14 [0.55] |
|           | G ¼ B, ¼ NPT, R ¼ | 41 [1.61]             | 45.6 [1.80]  | 26.6 [1.05] | -       | 13 [0.51] | 14 [0.55] |
| 50 [2"]   | G ⅝ B, ⅝ NPT, R ⅝ | 55 [2.17]             | 50 [1.97]    | 29 [1.14]   | 5 [0.2] | 10 [0.39] | 14 [0.55] |
|           | G ¼ B, ¼ NPT, R ¼ | 55 [2.17]             | 53 [2.09]    | 29 [1.14]   | 5 [0.2] | 13 [0.51] | 14 [0.55] |
| 63 [2 ½"] | G ⅝ B, ⅝ NPT, R ⅝ | 68 [2.68]             | 50 [1.97]    | 29 [1.14]   | 5 [0.2] | 10 [0.39] | 14 [0.55] |
|           | G ¼ B, ¼ NPT, R ¼ | 68 [2.68]             | 53 [2.09]    | 29 [1.14]   | 5 [0.2] | 13 [0.51] | 14 [0.55] |

1) The G ⅝ B process connection of this instrument is manufactured without a centring spigot and with a thread runout instead of a thread undercut.

| NS        | Weight in kg [lb] |
|-----------|-------------------|
| 40 [1 ½"] | 0.06 [0.13]       |
| 50 [2"]   | 0.07 [0.15]       |
| 63 [2 ½"] | 0.08 [0.18]       |



## Accessories and spare parts

| Model                                                                               | Description               |                                                                                 |
|-------------------------------------------------------------------------------------|---------------------------|---------------------------------------------------------------------------------|
|    | <b>910.33</b>             | Adhesive label set for red and green circular arcs<br>→ See data sheet AC 08.03 |
|                                                                                     | Order number NS 63 [2 ½"] | 14238946                                                                        |
|    | <b>910.17</b>             | Seals<br>→ See data sheet AC 09.08                                              |
|    | <b>910.15</b>             | Syphons<br>→ See data sheet AC 09.06                                            |
|    | <b>910.13</b>             | Overpressure protector<br>→ See data sheet AC 09.04                             |
|    | <b>IV1</b>                | Needle valve and multiport needle valve<br>→ See data sheet AC 09.22            |
|   | <b>IV2</b>                | Block-and-bleed valve<br>→ See data sheet AC 09.19                              |
|  | <b>IVM</b>                | Monoflange, process and instrument version<br>→ See data sheet AC 09.17         |
|  | <b>BV</b>                 | Ball valve, process and instrument version<br>→ See data sheet AC 09.28         |

### Ordering information

Model / Nominal size / Scale range / Process connection /  
Connection location / Options



© 02/1995 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.  
The specifications given in this document represent the state of engineering at the time of publishing.  
We reserve the right to make modifications to the specifications and materials.